

CHEM-7

**the next-generation
clinical chemistry analyzer**



56 Direct Access Keys

Monitoring of Q.C.

Unique Triple Cuvette System

Low Reagent Consumption

Compact Design

Battery Backup Unit

Direct Printer / Keyboard Connectivity

Technical Specifications¹

Optical Module

- Static photometer
- 8 interference filters 340, 405, 450, 505, 546, 578, 600 and 670 nm
- Silicon photodiode detectors
- Photometric Range from 0 to 2.5 OD
- Quartz Halogen Lamp of 12V, 20W

Measuring Module

- Unique Triple Cuvette System
 - 18 µl Flow cell
 - 10 mm Square Cuvette
 - 6 mm Round Glass Tube with Adaptor
- Peltier Temperature Control: 25°C, 30°C, 37°C and Off
- Peristaltic Pump
- Minimum Aspiration Volume 200 µl

Analysis Modes

- | | |
|----------------------|-----------------------------------|
| - 1-point linear | - Rate A non-linear |
| - 2-point linear | - 1-point sample blank linear |
| - 1-point non-linear | - 1-point sample blank non-linear |
| - 2-point non-linear | - Absorbance |
| - Rate A linear | - Coagulation |

Memory

- 200 User Defined Test Programs
- 1000 Test Result
- Reagent Blank
- 2 Level QC

Result Recall

- Collated Reports by date, ID or both

Built-in QC

- Daily and Monthly monitoring for 2 level Levy-Jenning QC Graphs

Display

- High Resolution Graphics LCD with backlight.
- View Area: 120 x 92 mm

Keyboard

- 41 Multifunction Keys and 6 dynamic keys

Printer

- In Built High Resolution Graphic Thermal Printer

Interface

- RS-232C Serial Port
- Parallel Port
- Port for External Keyboard

Power


- External Universal SMPS adapter
- 18V DC, 100W, 90-264 V, 50/60 Hz.

Size(mm) and Weight

- 205 (H) x 450 (W) x 300(D), Approx. 7 Kgs.

Optional Accessories

- External 16 Position Dry Block Incubator
- External Battery Back-up

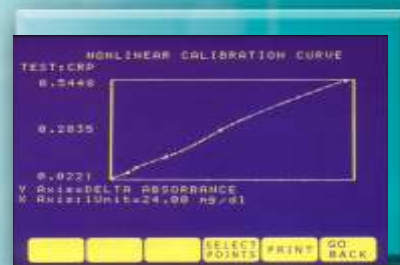

Multiple Calibration Modes



16 Position Dry Block Incubator



Battery Backup Unit



PC Keyboard Interface



Direct Patient Result Reporting

¹ Specifications are subject to change without prior notification.
Accessories shown are not part of the standard accessories

ERBA diagnostics Mannheim GmbH

Mallaustr. 69-73, D-68219 Mannheim / Germany
Tel.: (+49) 0621 8799770
Fax: (+49) 0621 8799688
Email: sales@erbamannheim.com
Website: www.erbamannheim.com

